

EPD50 RESTO


INCLUDED IN BOX

- EPD50-RESTO with standard filter holder
- 5 m wire / Euro type F plug (black)
- 5 m wire / UK D-plug (black)
- Black shoulder strap
- 1 m flex duct 40 mm to fit
- Black plastic clip
- EPHUM-I-MAX humidistat
- 1 m "Curley" of controller cord / RJ11 connectors
- QR Code for full user manual

OPTIONAL ADDITIONAL PARTS AVAILABLE

PART NUMBER:

- 125mm input & output flange EPFLAN125R
- 90mm input and outlet flange EPFLAN90R
- 10m humidistat extension cord EPHUMEXT10M
- Replacement Filter pack of three EPFILPACK FOUR

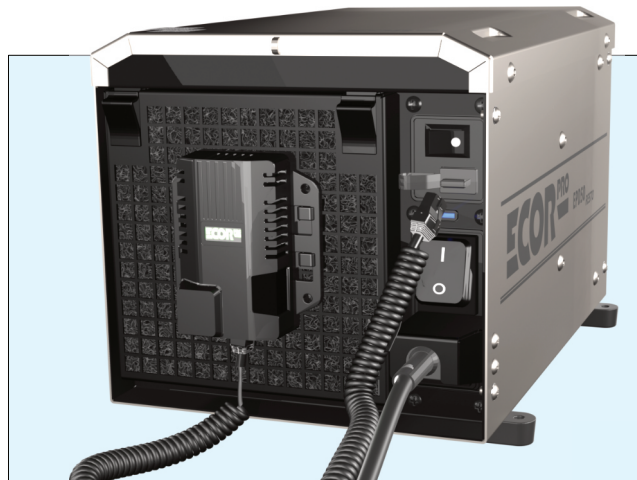

EPD50 RESTO, Stainless Steel Cover with epoxy finish black paint finish body.

Technical Data	EPD50-RESTO
Extraction @ 35°C / 90% RH	13 litres/day
Typical extraction @ 27°C / 60% RH	11 litres/day
Air Flow (Process Air in)	210 m ³ /hr
Air Flow (Exhaust Air Out)	35 m ³ /hr
Air Flow (Fresh Dry Air Out)	180 m ³ /hr
Mains (Single Phase)	230 V/50 Hz
Current @ 27°C / 60% RH	2.4 A
Power @ 27°C / 60% RH	0.55 kW
Temperature Range	-20 0C - +40 0C
Dimensions LxDxH	328 x 197 x 207 mm
Net Weight	6.1 kg
Noise Level	52 dB

REV11 Subject to Change.



Shipping Code 6329

Made in P.R.C.

ECOR PRO Ltd
P O BOX 778, Backworth NE27 OBJ, UK
Tel + 44 191 816 2896

POWERED BY

